



YML01CR-HRxxH



PRODUCT DESCRIPTION

Features:

- High efficiency >90%
- Available in 7 beam pattern
- Optimized for uniform effects
- Lens material Optical grade PMMA
- Lens with holder

Typical applications:

- Stage Lighting
- Street Lights
- Decorative Light
- Down Light

TABLE OF CONTENTS

General Information	2
Usage and Maintenance	2
2D Drawings	3-9
Optical Characteristics (for CREE 3535 led)	3-9
Package Information	10
Product Nomenclature	11



General Information (TJ = 25°C)

- Compatible Led Type:

The YML01CR-HRxxH single lens is optimized for CREE 3535 LED

- Beam Angle Type:

An optimized profile integrate different front shape enabel the general of one lens model:oval beam
(5 deg;08 deg;12 deg;24 deg;36 deg;60 deg;10*30 deg)⁽¹⁾

- The Way to Assembly:

The lens should be assembled to the PCB board or MCPCB upon LEDs which provides the most appropriate related position,so as to achieve the best uniform results.

*** Manually installation or if necessary thermal glue are recommended.**

- Fuction:

YML01CR-HRxxH provides exceptional color mixing result with the highest efficiency through careful enginnering and precision manufacturing process.

Usage and Maintenance

- 1.Clean lenses with mild soap and water and a soft cloth.
- 2.Don't use any commercial cleaning solvents on lenses,like alcohol.
- 3.Operating temperature -40℃~+80℃(upper limit +90℃)
- 4.please handle or install lenses with wearing gloves,skin oils may damage lens or optical characteristic.

Notes:


(1) Typical beam divergence will be affected by different LED manufacturers.



LENS

Technical drawings of a mechanical part, showing top, side, and cross-sectional views with dimensions:

- Top View:** A circular part with a central hole. The outer diameter is $\varnothing 35.00$. The inner hole diameter is $\varnothing 8.60$. The distance from the center to the edge of the central hole is 3.50 .
- Side View:** A cross-section showing the profile of the part. The total height is 2.00 . The distance from the base to the top of the central hole is 0.90 . The distance from the base to the bottom of the central hole is 0.77 .
- Bottom View:** A cross-section showing the profile of the part. The total height is 17.85 . The distance from the base to the top of the central hole is 0.90 . The distance from the base to the bottom of the central hole is 2.00 .

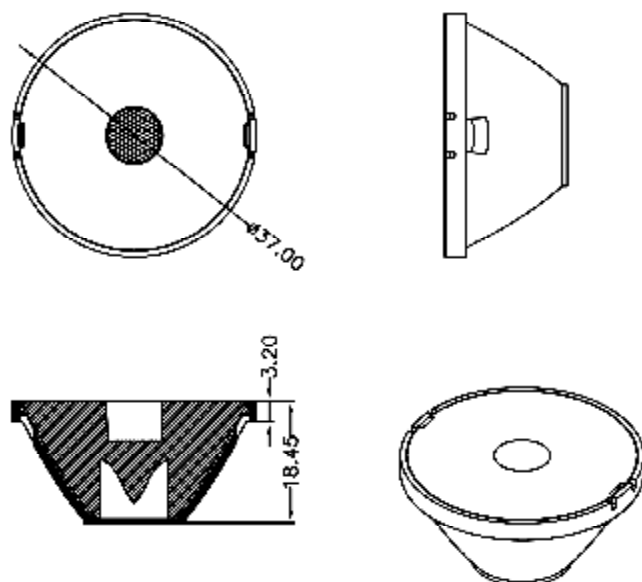
LENS

LENS WITH HOLDER






2D Drawings (unit:mm)

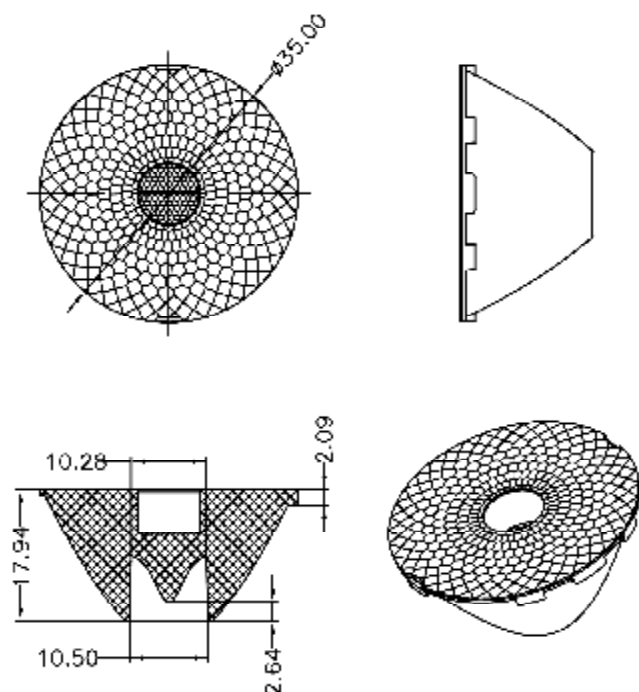


LENS

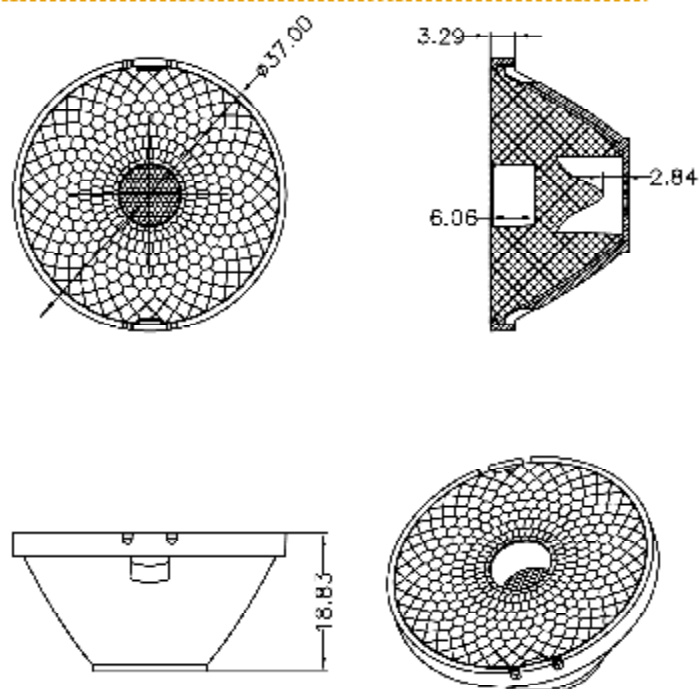



LENS WITH HOLDER

Optical Characteristics (for 3535 LED)

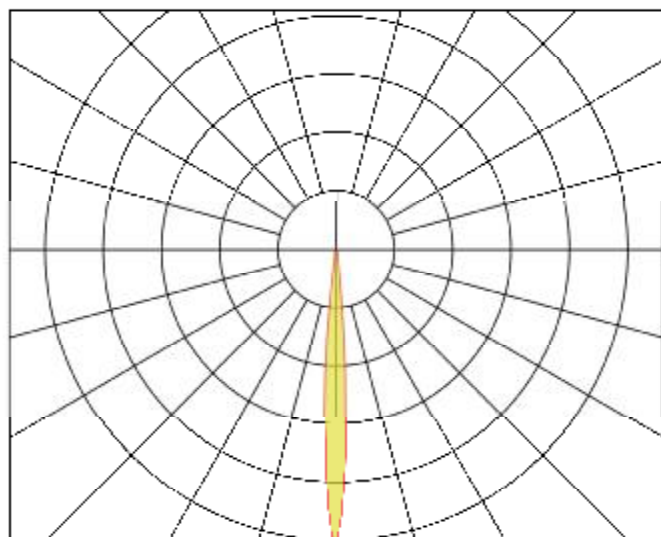




2D Drawings (unit:mm)

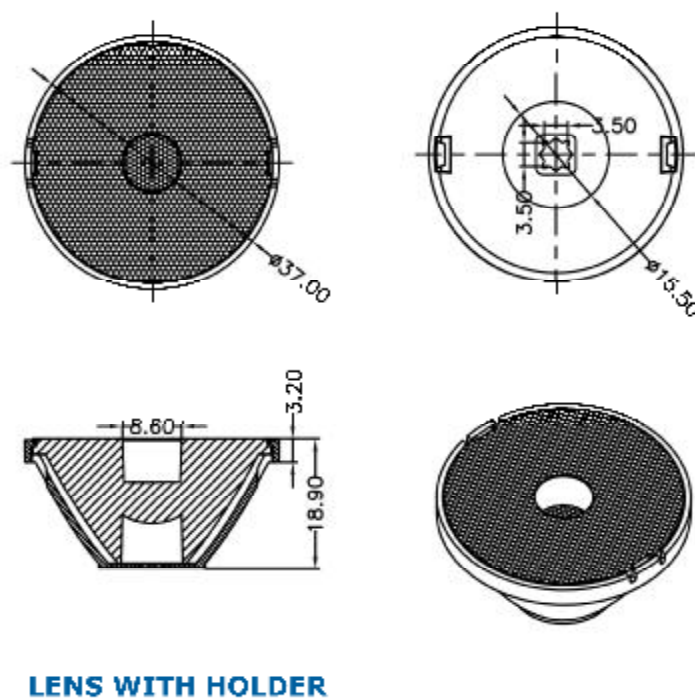
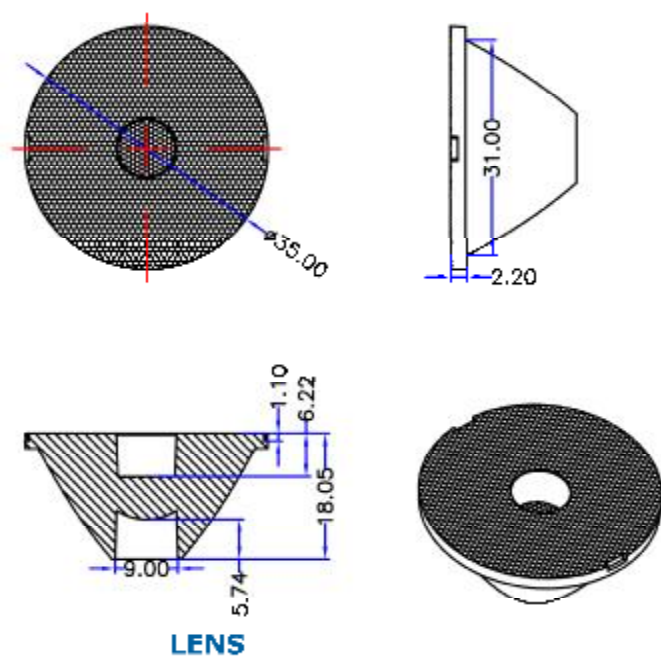


Optical Characteristics (for 3535 LED)


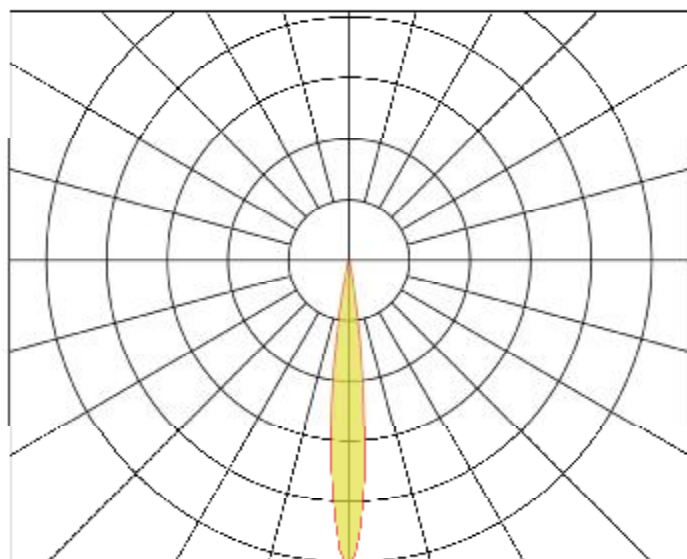




2D Drawings (unit:mm)

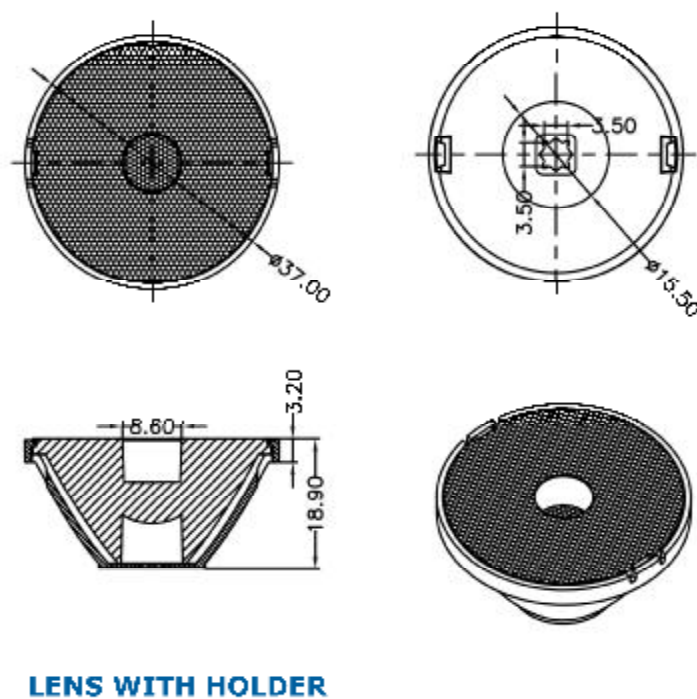
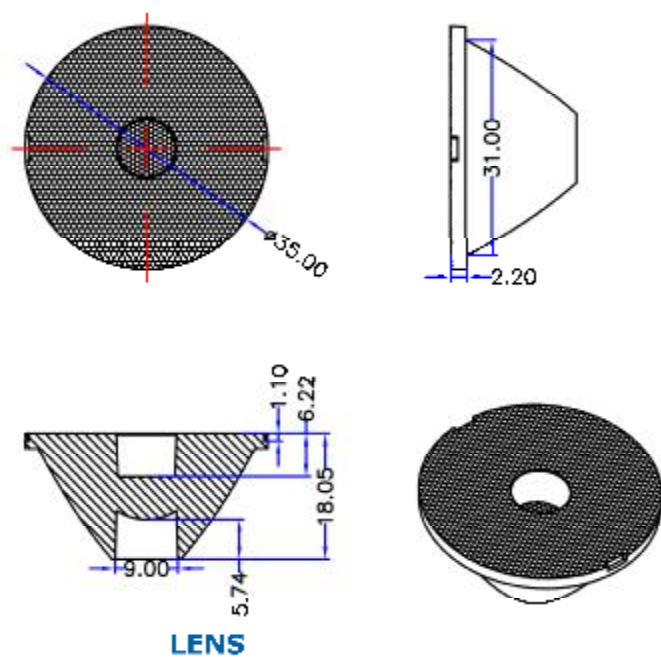


Optical Characteristics (for 3535 LED)

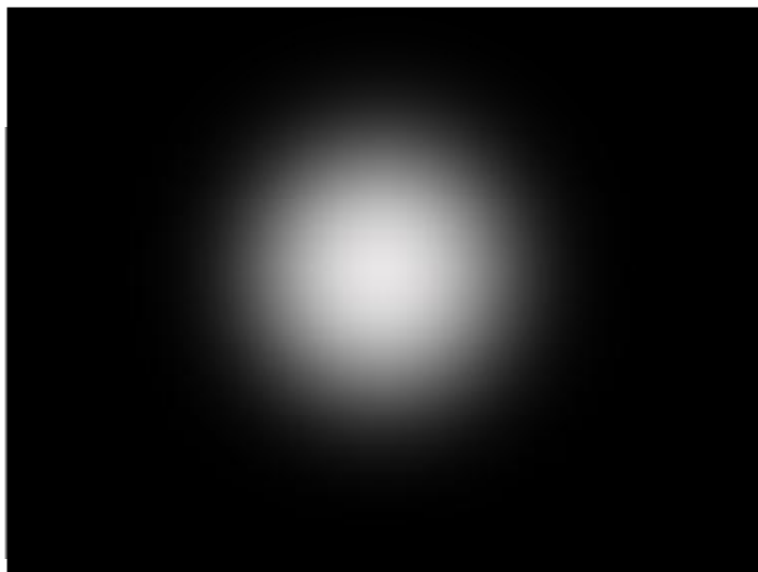
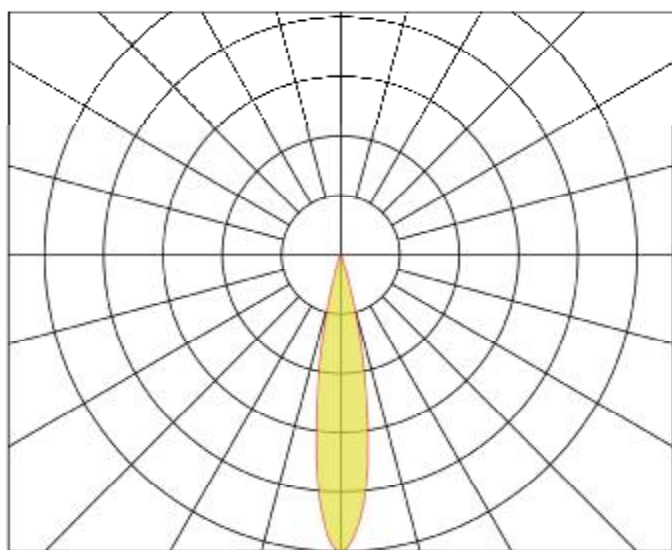




2D Drawings (unit:mm)

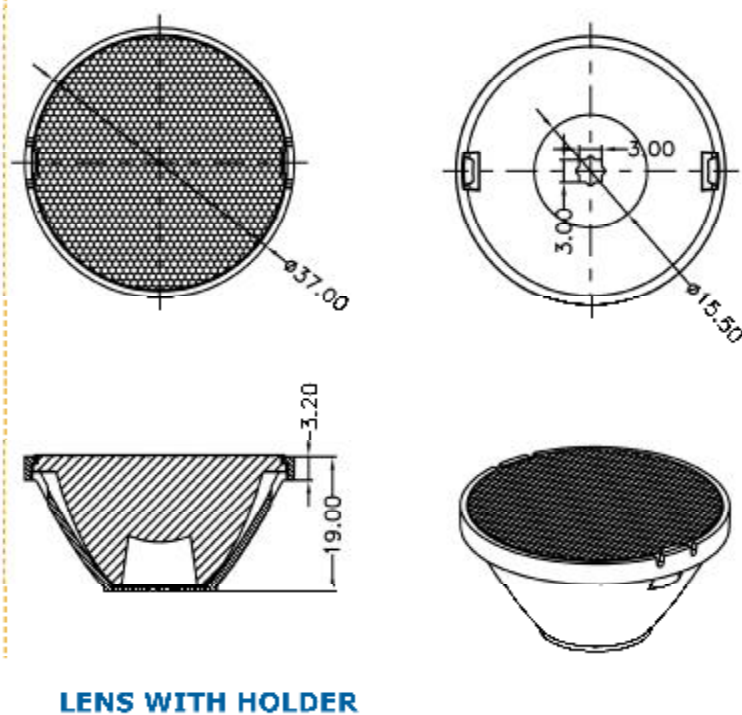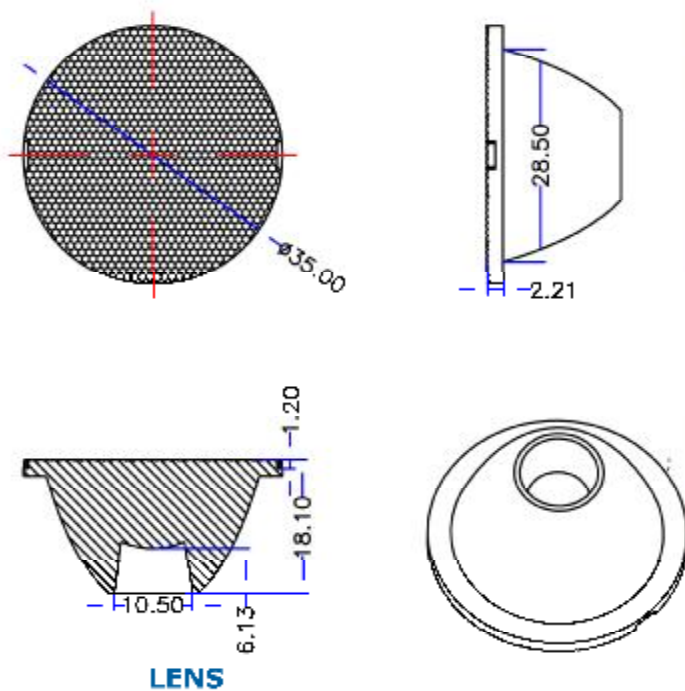


Optical Characteristics (for 3535 LED)

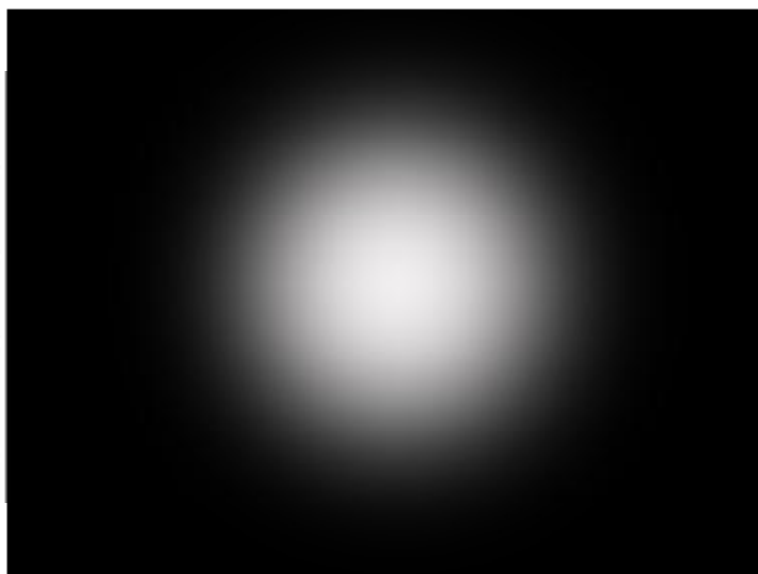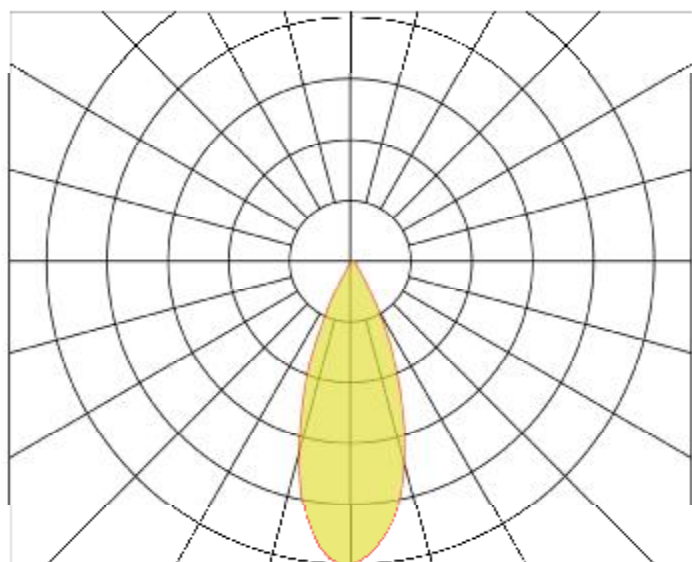




2D Drawings (unit:mm)


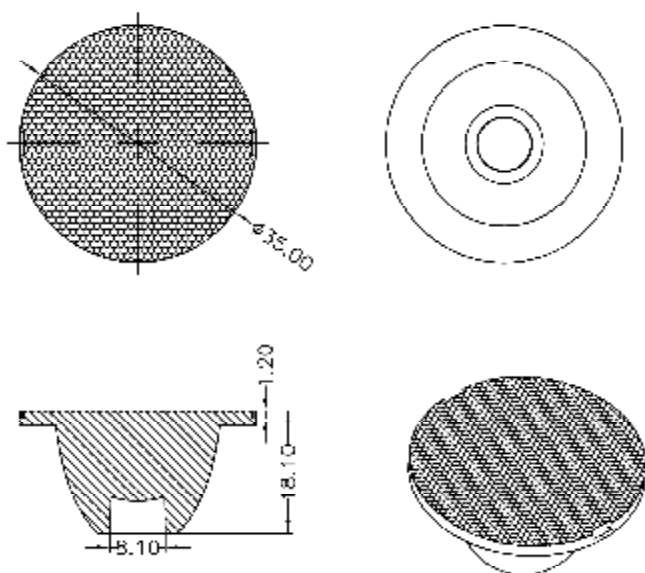


LENS

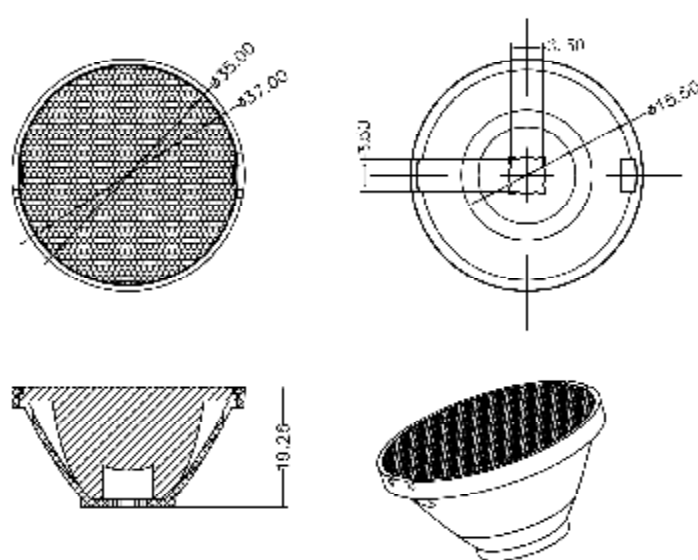


LENS WITH HOLDER

Optical Characteristics (for 3535 LED)

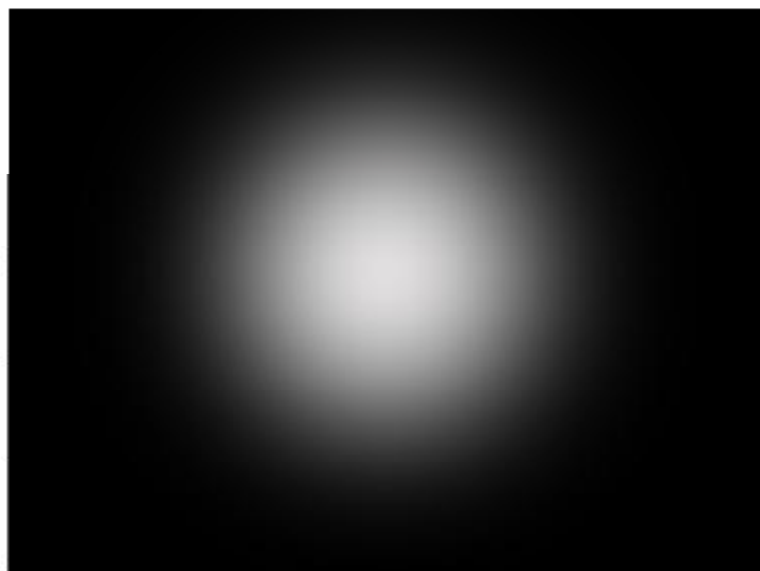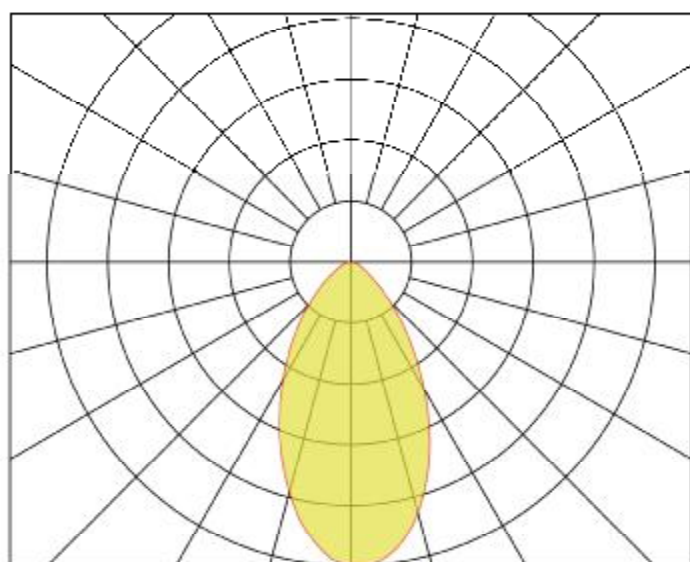




2D Drawings (unit:mm)


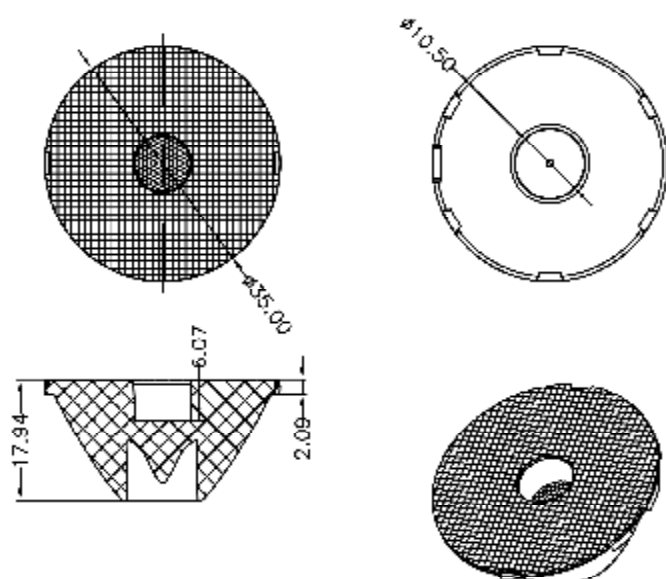


LENS

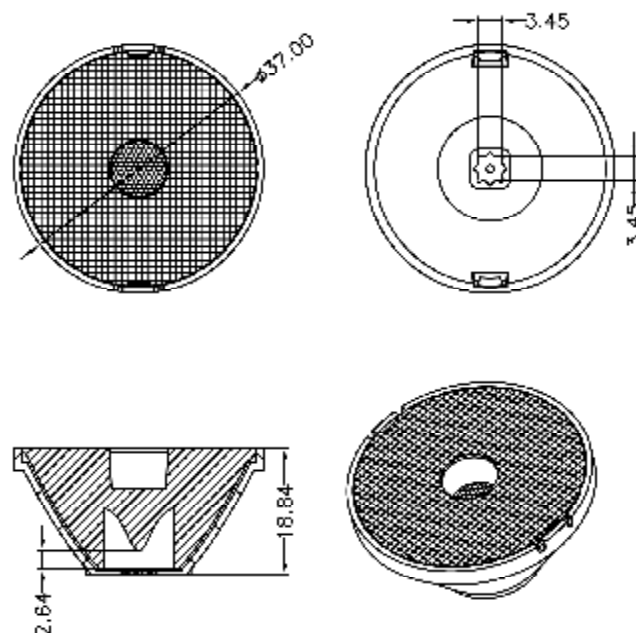

LENS WITH HOLDER


Optical Characteristics (for 3535 LED)

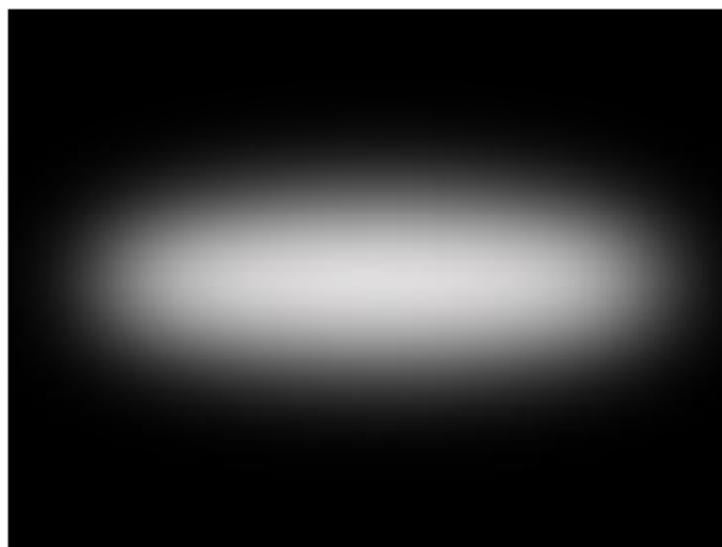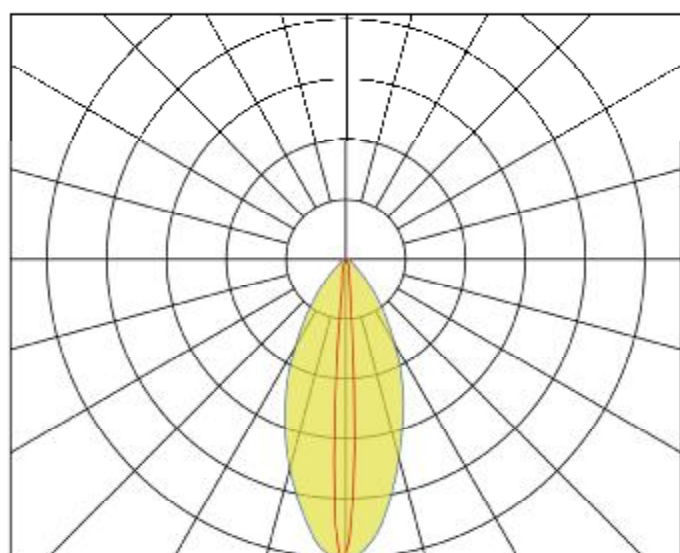





Package Information



Item	Quantity	Total	Size (long*width* high)
Tray	9 pcs/tray	9pcs	—
Inner box	6 tray/inner box	54pcs	12.5*12.5*12.5 cm
Outer box	18 inner box/outer box	972pcs	42.0*39.0*28.0 cm



9pcs/tray



54pcs/inner box

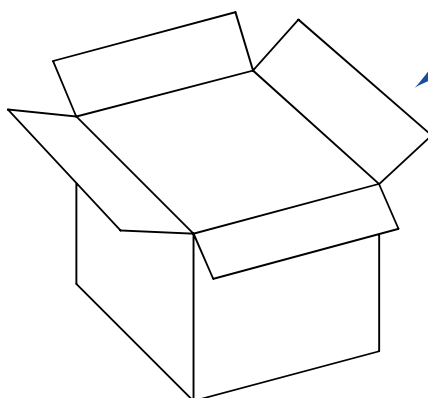

972pcs /outer box



Product Nomenclature

